


MS 6116 T-Y

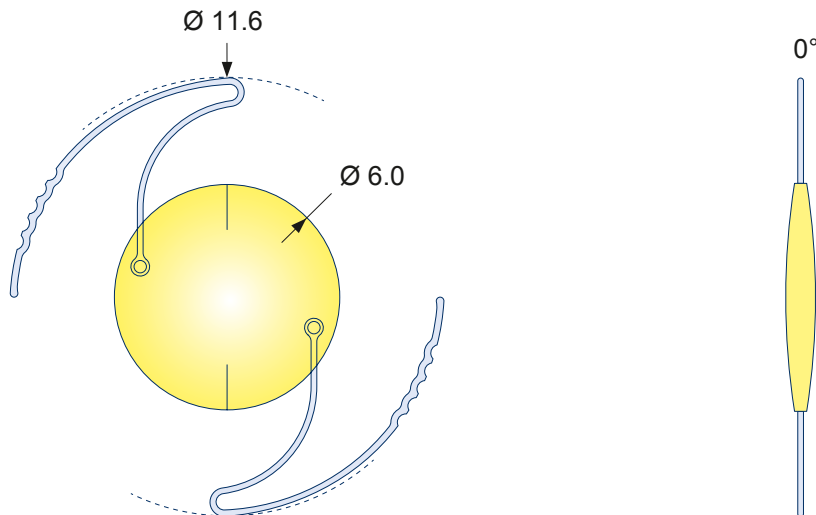

on a scale of 5:1

Technical Information

| | |
|---------------------------|---|
| Type | Toric Posterior Chamber IOL with Blue Light Protection (Three-Piece, Foldable, 360° Sharp Optic Edge) |
| Optic Material | Silicone Elastomer with UV-Absorber and Yellow Colouring Agent |
| Haptic Material | High Molecular PMMA |
| Haptic Shape | Undulated Z-Loop |
| Optic Shape | Spheric Anterior Surface, Toric Posterior Surface |
| Sphere Range | in 0.5 D steps: 15.0 to 25.0 D in 1.0 D steps: -30.0 to 14.0 D / 26.0 to 34.0 D |
| Cylinder Range | in 0.5 D steps: 1.0 to 3.0 D in 1.0 D steps: 4.0 to max. 30.0 D* |
| | Availability depending on combination of sphere and cylinder. More details on dioptric categories see page 2 |
| A-Constant (est.)* | 118.6 |
| Cylinder Axis | The Two Thin Diametrically Opposed Lines in the Periphery of the Optic Indicate the Axis of the Plus-Cylinder |


Dr. Schmidt Intraocularlinsen GmbH, Germany

Westerwaldstr. 11-13
53757 Sankt Augustin

Phone: +49 (0) 2241 / 25 787-0
Fax: +49 (0) 2241 / 25 787-88

mail@dr-schmidt-iol.de
www.dr-schmidt-iol.de

Diopter Category – MS 6116 T-Y

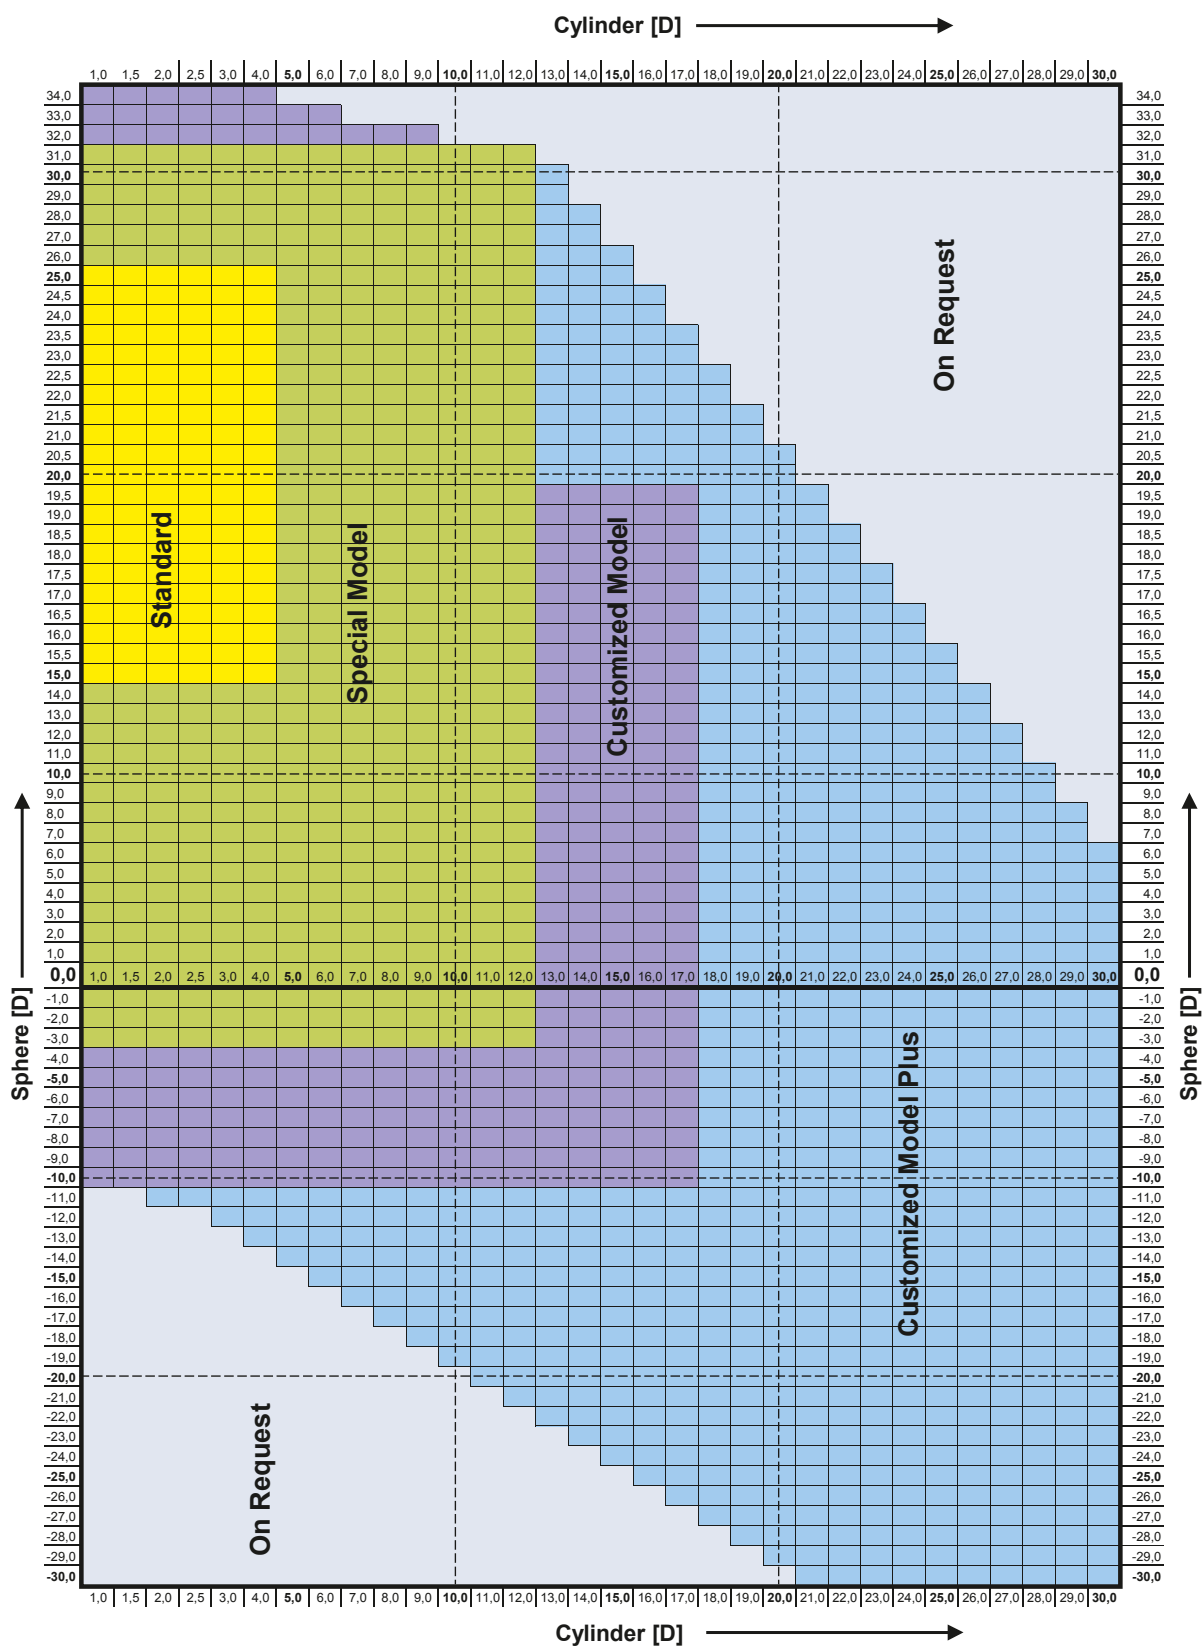

The dioptric category does not indicate any conclusion related to availability. The delivery time of single powers might vary and is subject to change.