


MS 614 Diff

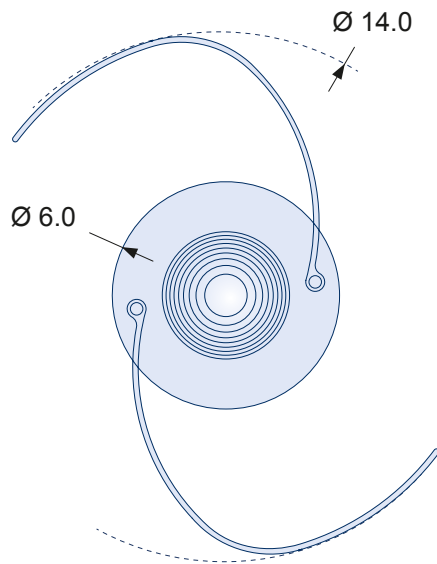

on a scale of 5:1

Technical Information

<b>Type</b>	Multifocal Posterior Chamber IOL (Three-Piece, Foldable) for Sulcus Fixation
<b>Optic Material</b>	Silicone Elastomer with UV-Absorber
<b>Haptic Material</b>	High Molecular PMMA
<b>Haptic Shape</b>	Modified C-Loop
<b>Optic Shape</b>	Diffractive Aspheric Anterior Surface, Spheric Posterior Surface (Aberration Correcting)* Biconvex
<b>Diopter Range</b>	10.0 to 30.0 D
<b>Diopter Steps</b>	0.5 D
<b>Near Addition</b>	+ 3.5 D (on IOL Plane)
<b>A-Constant (est.)**</b>	118.0

Dr. Schmidt Intraocularlinsen GmbH, Germany

Westerwaldstr. 11-13  
53757 Sankt Augustin

Phone: +49 (0) 2241 / 25 787-0  
Fax: +49 (0) 2241 / 25 787-88

mail@dr-schmidt-iol.de  
www.dr-schmidt-iol.de

\* The word „aberration“ as used in this document is interpreted as „spherical aberration“

\*\* For current status and more details please refer to [www.dr-schmidt-iol.de/a-constants.pdf](http://www.dr-schmidt-iol.de/a-constants.pdf)